

Span's low-bed design with advanced clinical positioning and ReadyWide[®] integrated expansion





Tool-less, "two-click" expansion.

Advanced Clinical Positioning

Auto Contour

....





better science. better care. a division of Savaria

www.spanamerica.com



The Advantage ReadyWide model with advanced features such as mobility at any height, easy optional sleep surface expansion to 42" (1067 mm), a multi-function dolly system and a safe working load of 500 lbs (227 kg).



Optional, moulded quick release plastic half-head assist rails.



Optional 3-position side assist rail offers ingress-egress support.



In addition to the standard pendant controller, a foot-end control with staff-only lockout is available.



Optional full 360° mobility and lockability at any height for safer, ergonomic bed relocation.







Trapezoidal slat profile provides unmatched strength, ventilation, and ease of cleaning.



Simple, push-button ReadyWide[®] operation: Click once to pull expanders out to 39" (991 mm) wide. Click again for 42" (1067 mm) width.



Optional dollies facilitate easy under-bed service and bed passage on its side through narrow doorways.

Smart Stop® automatically stops lowering when deck reaches 12.5" (318 mm) from floor.



Comfort Chair



Optional dual-position, dual-intensity underbed lighting.

90° angle

Helps ensure safer, more ergonomically correct transfers. Positions typical user at ideal height* and leg angle for egress/regress. (*12.5" (318 mm), plus height of mattress)



Bleached Oak also available for Standard profiles

Standard features include:

- Durable, anti-microbial polyester powder-coating of metal components
- Smooth deck design for easier cleaning
- Mobility at any height ٠
- Foot end controller with lockout ٠
- · Vascular foot rest with easy ratchet operation
- Beds move vertically with virtually no horizontal motion ٠
- Pendant bed controller

Optional features:

- Advanced mobility as well as floor level locking
- Molded half-head assist rail
- Dollies for streamlined bed logistics and maintenance
- Stylish head and foot board options
- Bed extenders •

Height Floor to Mattress Support	7-7/8" – 31" / 200 mm - 787mm
Deck Angles - Back Elevation	0 – 70°
Deck Angles - Knee Elevation	0 – 30°
Bed Length - Overall Length	82", 86", 90" / 2083 mm, 2184 mm, 2286 mm
Bed Length - Sleep Surface	76", 80", 84" / 1930 mm, 2032 mm, 2134 mm
Bed Width - Sleep Surface	35", 39", 42" / 889 mm, 991 mm, 1067 mm
Weight of Bed (without accessories)	259 lbs / 118 kg
Safe Working Load	500 lbs / 227 kg
Warranty	Mechanical: 5 years Frame: 10 years Welds: 15 years

Contact your local Span Representative or call Beds/Furniture Customer Service: 800-268-8671

Item # Description MC7W Advantage ReadyWide with foot end controls MC7WM Advantage ReadyWide with mobility & foot end controls MC7WL Advantage ReadyWide with floor lock & foot end controls MC7WMI

MC7WML	Advantage ReadyWide with mobility, floor lock & foot end controls
R9938	3 position molded pivot assist rail
R9939	Set of 3 position molded pivot assist rails
R9308H	Set of molded head end half side rails
R9308H-L	Left side molded head end half side rail
R9308H-R	Right side molded head end half side rail
R9518	Split side rail, 3/4 bed coverage
Q6749	Under bed lighting - factory installed
Q6701	Battery back up - factory installed
Q6740	Floor placement arm
Q6741	Retractable power cord cable reel & placement arm
Q6690	Bed extender to 84"
Q6730	Patient helper, trapeze bar, chain and hand grip
Q6731	Trapeze bed mounting bracket
Q6703	Bed and deck angle indicator
Q6699	Bed transportation system
Q6531	Honeycomb roller bumper kit

better science. better care. a division of Savaria

www.spanamerica.com





DVANTAGE

READYWIDE

with our interactive

configurator at





Virtuoso Performance in Resident Care Beds






Online Resources



www.spanamerica.com/encorevideo







We invite you to use the link at left to view a video performance of all of Encore's key features and operate the bed yourself in virtual 3D.

And, visit our website to try out the **Bed Configurator**, which allows you to outfit and view an Encore bed with the options that meet the specific demands of your caregiving environment.

Innovative features, operating in concert.



Provides enhanced levels of care and comfort for the user, better ergonomics and protection from injury for the caregiver.

KEY ENCORE INNOVATIONS:

Glide Align[™] retractable deck technology ReadyWide[™] integrated expandability SmartStop[™] low position auto-pause

page 4 page 6 page 7

GlideAlign[™] Retractable Deck Technology


Perfectly aligned with your facility's safety goals.

Superior fall prevention: By helping the user maintain vertical alignment, Encore helps ensure that all points in the bed environment remain more safely within user's reach (see illustrations p. 5).

Superior staff protection: Helps offset the tendency to slide down in bed as head of bed (HOB) is elevated, reducing the need for frequent repositioning that can lead to staff patient handling injuries.


Encore's deck moves - so the user doesn't have to.

4



Superior protection from shearing

By reducing sliding during HOB elevation, helps minimize opportunity for skin shearing at vulnerable sacrum, scapula and heels.

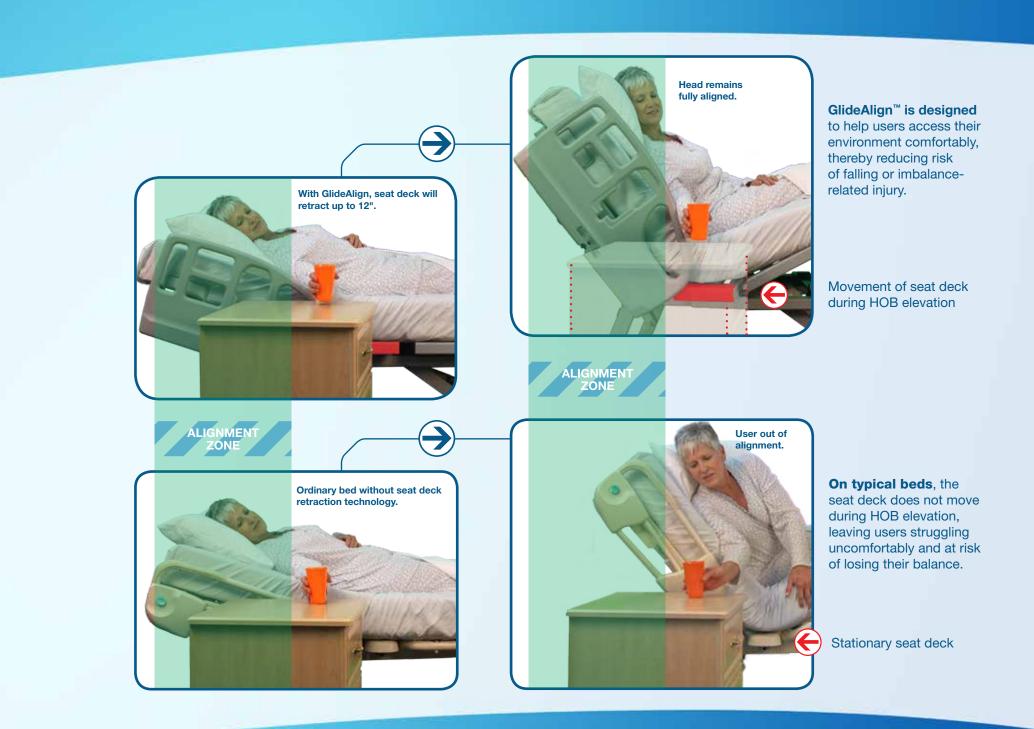



ReadyWide[™] Integrated Expansion

. . .

0

.




No bolts. No tools. No pins. Retracts into deck. Nothing to store, lose, or become loose.



Tool-less, "two-click" expansion.



Navigates narrow doorways: Fast, hassle-free bed mobility.



• Simple, push-button operation: Click once to pull expanders out to 39" wide. Click again for 42" width.

1.71

. . .

0

0

- Can be factory-installed at time of order, or ordered separately as needed (see back page for options).
- **Expands treatment flexibility,** supported by Encore's 600 lb. Safe Working Load (SWL).



Wider surface facilitates enhanced user comfort, fall prevention, transfers and ADLs.





Smart Stop[™] low position auto-pause





Dual underbed indicators flash as bed enters "low height caution zone."

Improves low-bed safety and ergonomics:

- Automatically stops lowering when deck reaches 12.5" from floor.
- Lowering can then be resumed via foot-end (staff) control only.
- Provides cue for caregiver to confirm underbed clearance.
- Eliminates potential hazard of patient lowering bed onto unseen obstructions via hand pendant.
- Can aid in reducing injury, falls by users who might otherwise attempt egress from a "too-low" position.

90° angle

Helps ensure safer, more ergonomically correct transfers. Positions typical user at ideal height* and leg angle for egress/regress. (*12.5", plus height of mattress)





Key Standard Features



Head/footboard options see page 10





Durable flexible polyester finish on individually powder-coated parts.

> Four (4) synchronized DC self-lubricating actuators

Trapezoidal slat profile provides unmatched strength, ventilation, and ease of cleaning.



Precision welds with lifetime guarantee.

Baseboard bumper

Hospital-grade ball bearing swivel casters, provide full mobility at any height. Head-end includes directional lock-out.

8



Dual-position, dualintensity underbed lighting.


- Standard on both left and right.
- Selectable bright or discreet nighttime floor level illumination.



Travels virtually straight up and down; maintains ample underbed clearance.



Encore

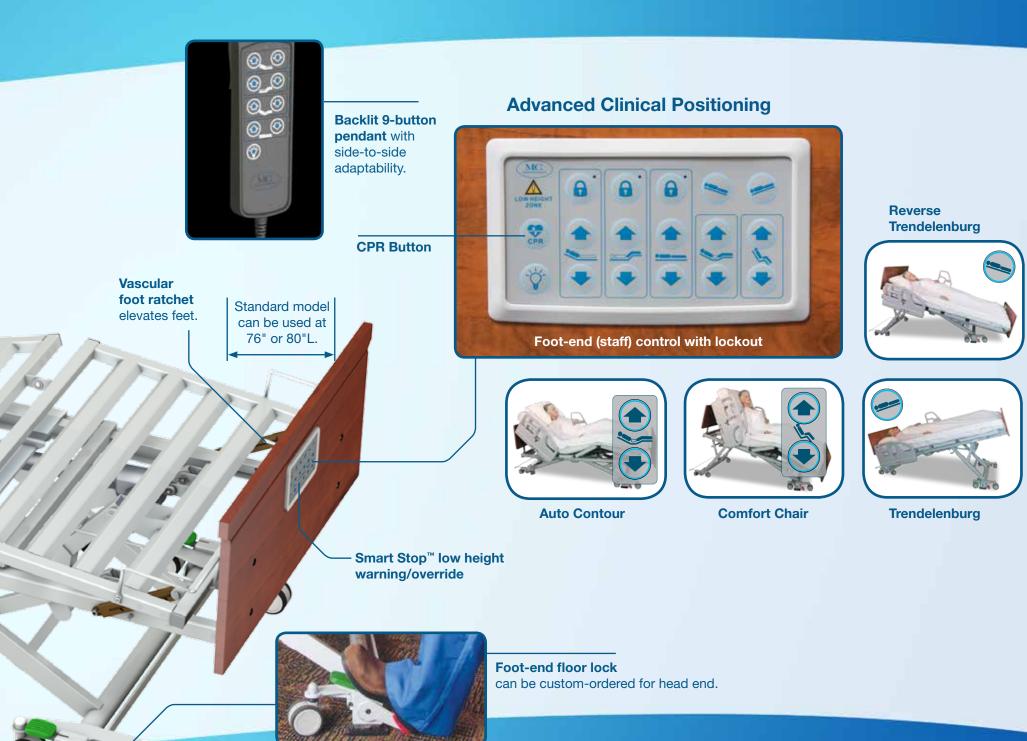



Options & Accessories



Standard Profiles

Essex Lincoln Kent Standard



Elite Profiles

Lethbridge Pembrooke Trenton Princeton





Recessed pendant holder, included, fits all rails and supports pendant facing either toward user or toward caregiver.



Bed extenders to 84"

Q6690



Transport Dollies for easy mobility and passage through narrow doorways; simplified access to under-bed components.

(10)

Q6699 (1 set)





Molded plastic half-rail

R9307H (set of 2)

ReadyWide[™] integrated expanders

Q6689 (see page 6.)

Additional Accessories

- Built-in backup battery (factory- or field-installed)
- Portable backup battery
- Drainage hooks
- IV pole
- Trapeze





Bed & deck angle indicator kit

Q6703

(11

Gooseneck headboard-mounted pendant holder

Q6417LP



Honeycomb roller bumper kit

Q6708



Ergonomic 3-position assist device locks perpendicularly for sturdy ingress/ egress support, protecting both user and caregiver. Both 3-position and half-length assist devices are made of molded, pleasing-to-touch plastic.

R9955 (1 ea, interchangeable L or R) **R9956** (set of 2)





Virtuoso Performance in Resident Care Beds

Virtuoso Performance in Resident Care E	Beds	etteenologia	Production to the second	State Control	280 nobility	Lood WWIG	expander kit	up battery
MODEL NUMBER	Glide ratio cable	SIN ⁶ dual	Foot locks	Floot of	600 ton	Read Nitt	Built Built	
MC9R	X	Х	Х	х	X			
MC9RW	x	Х	Х	х	х	Х		
MC9RZ	x	Х	Х	х	x		X	
MC9RWZ	X	х	х	х	х	X	X	

Unight Floor to Mottygon Cumpart	7-7/8" - 31"
Height Floor to Mattress Support	
Deck Angles - Back Elevation	0 – 70°
Deck Angles - Knee Elevation	0 – 30°
Bed Length - Overall Length	82", 86", 90"
Bed Length - Retraction Travel	12"
Bed Length - Sleep Surface	76", 80", 84"
Bed Width - With Side Rails	40-1/2", 43-1/2", 46-1/2"
Bed Width - Sleep Surface	35", 39", 42"
Mattress Support Deck Const.	Welded steel tube and slats
Mattress Stops	Steel Corner and Side Stops
Bed End Panels	Permanent or removable mounting
Electrical & Mechanical Certification	ANSI/AAMI ES60601-1:2005, Medical electrical equipment
	CAN/CSA-C22.2 NO. 60601-1-08 - Medical electrical equipment
	CAN/CSA-C22.2 NO. 60601-2-52:11 - Medical Beds
	CAN/CSA-C22.2 NO. 60601-1-2-08 - EMC
Classification	Class 1, Type B
VAC/Hertz/Phase	120/60/1
Maximum Input Current Rating	3.5 Amp (120V)

Cord Type/Length	2.5 Meters minimum, 3 prong hospital grade plug
Electric Motors	Four (4) DC self-lubricating linear actuators
Operation	10% Maximum Duty Cycle (2 minutes on,18 minutes off)
Emergency Power back-up battery Pack	24V DC Internal or External Battery with Charger
Ingress Protection Rating	IPX4 (Electrical components IP66)
Audible Acoustic Energy	Less than 80 dBA
Weight of Bed	253 lbs / 115 kg without any accessories
Safe Working Load	600 lbs / 272 kg (Includes weight of accessories, options and bedding)
Mobility	At any height (7-7/8" - 31")
Swivel Casters	Heavy duty dual 3" Casters
Warranty	Mechanical: 5 years; Frame: 10 years; Welds: 15 years.

Outfit your Encore with one of Span's many outstanding support surfaces up to 42" wide. Options include:

PressureGuard Easy Air® Series



Geo-Mattress Atlas® Bariatric Foam



Geo-Mattress[®] UltraMax[™] **Therapeutic Foam**



Custom Care® Convertible Series





Beds/furniture customer service: 800-268-8671

Support surfaces customer service: 800-888-6752

spanamerica.com © 2013 Span-America Medical Systems, Inc.

COMFORT**WIDE**™ Series





Floor Level Height

- Falls Risk Floor level (3.6" low height) with optional floor mat and advanced falls notification system to address high risk resident falls
- **Bariatric Dignity** Provide bariatric residents the same equipment (42" wide/600lb capacity) utilized throughout your facility.
- **Custodial Care** Enhance resident comfort (42" width) and height (up to 30") to take care of custodial residents.
- Short Term Rehab advanced features (cardiac chair positioning, trend/reverse trend), optional scale, optional bed exit to manage higher acuity residents.
- Standardization Improve staff training as well as maintenance with ONE bedframe solution across your facility.
- Industry Leading Warranty Made in the USA with a best in class warranty (lifetime on the welds, 15 years on the frame, 5 years on the Linak motor/drive system)



$COMFORTWIDE^{TM}$ Series

AllCare Bed **SPECIFICATIONS**

Deck Height Low	3.6" optional (8.5")
Deck Height High	25" optional (30")
Sleeping Surface	35"w, 39"w, 42"w x 80/8
Maximum Safe Working Capacity	600 lbs
Product Weight	275 lbs

LIMITED WARRANTY

15 years on bed frame mechanics
5 years on drive system

1 year on wood, casters & handsets Lifetime warranty on all welds

A SNF experienced a 100% Reduction in BedFalls when using the AllCare Frame and Safety Mat

ENDBOARD OPTIONS





technology for post acute care. We are focused on partnering with you to help address healthcare challenges in the following key areas-



MOBILITY

WOUND CARE

COMFORT**WIDE**™ Series



PUSH-BUTTON SLIDE TECHNOLOGY WITH LOCKING POSITIONS 35-39-42-48 INCHES WIDE



- **Bariatric Dignity** provide bariatric residents the same look of the equipment (48" wide/800lb capacity) utilized throughout your facility.
- Comfort Wide[™] bed expands to 48 inches wide without the use of tools for more comfort and flexibility
- Under Bed Clearance completely open underneath for unobstructed access with lifts or assisting devices
- Advanced Positioning advanced features (cardiac chair positioning, trend/reverse trend) with 5 function handset.



$COMFORTWIDE^{TM}$ Series

BariatricBed EX 8000 Model **SPECIFICATIONS**

Deck Height Low	. 9" (optional 14")
Deck Height High	. 25" (optional 30")
Sleeping Surface	. 35"w, 39"w, 42"w, 48"w x 80"l
Maximum Safe Working Capacity	. 800 lbs
Product Weight	. 269 lbs

LIMITED WARRANTY

15 years on bed frame mechanics 5 years on drive system 1 year on wood, casters & handsets Lifetime warranty on all welds



ENDBOARD OPTIONS

STANDARD BOARD SHAPE	ENGLISH	оак манс	DGANY	CHER	RY	LIGHT OAK	
	Length Side Rail				Trapeze Assemb	Iy	
Pivot	ing Assist Bars				4" and 8" Be	d Extender	
PROUDLY MADE IN T (877) 867-7365 MED-MIZER.CO	HE U.S.A.	Accessory Br		0	Transport Dolly	Battery backup	N.
		is at the forefront of innovatechnology for post acute focused on partnering with	ating medical care. We are	(L		Z	
FALLS PREVENTION	BARIATRIC CARE	address healthcare challe	enges in the	MOBILITY	REHABILITATION	WOUND CARE	





Part of the Elite Series of Beds

Integrated Deck Expansion System

Easily expand your sleep surface from 36" to 39" to 42" width through the simple pull of a button, and 80" to 84" length.

Four Year Warranty on Electronics

15 year warranty on bed deck and frame welds.

Low Height

The Elite EX travels from a low of 7" to a convenient high height of 30".

Center Step Safety Lock Comes Standard

Lock your bed in place with one quick step.

Fully Adjustable

The four motors provide your residents with comfort positioning at the head and foot area, as well as height adjustment.

600 lbs. Safe Working Load

Features Include:

- Integrated deck expansion system
- 12 button handset
- Trapeze holder located at the head of bed
- Center step safety lock
- Wall bumpers
- Swivel locking casters
- Flip down caster guides for ease in steering

Optional Features:

- Standard wood grain head and foot boards
- Soft touch side rails
- Universal or folding assist bar
- Foot board mounted staff control
- Trapeze
- Therapeutic foam mattress
- Floor pad, 2" thick, x 2' x 6'

ITEM	80" Length (expands easily to 84")	84" Length
Bed Width	35" (can be expanded to 39" or 42")	35" (can be expanded to 39" or 42")
Bed width, with side rails:	40"	40"
Bed width, with assist bars	80"	84"
Overall bed length with head and foot boards:	84.5"	88.5"
Deck height range:	7"-30"	7"-30"

